

FAN COIL UNITS



euroclima®
We care for better air

MANUFACTURING AND DISTRIBUTION



Euroclima AG | Bruneck (IT)



Euroclima GmbH | Sillian (AT)



Euroclima Indien | Mumbai (IN)



Bini Clima Srl | Rovereto (IT)



Euroclima ME | Dubai (UAE)



THE COMPANY



Your best partner for fan coil units

Since 1963, Euroclima is a leader in customized air conditioning and ventilation systems. We develop, manufacture and commercialize high quality air handling products for all applications, from basic comfort to health care, process air and installations with highly efficient heat recovery systems.

Euroclima is a company with extensive international operations and 5 manufacturing facilities in Italy, Austria, India and UAE and more than 40.000 m² of production and offices. We are specialized in the manufacturing and worldwide distribution of air handling units and fan coil units.

We try to exceed the expectations of our customers by innovation, quality and comprehensive service. More than 450 employees are currently employed. Euroclima has a well distributed network of sales and service all over Europe, Asia, Middle East, Northern Africa and Australia. Our partners in various countries assume a regional covering responsibility for marketing, local servicing and optimal assistance.

Over the last 50 years, Euroclima has delivered more than 100.000 air handling and fancoil units all over the world.

Euroclima is ISO 9001:2015 certified.

Success story

The secret of Euroclima's long-standing and continuous success lies in the efficient project-management and the distinctive customer-orientation. We understand and address to our customer's needs and offer tailor-made solutions to optimize operating costs. This is achieved by:

- our professionalism and the commitment of all our employees
- our teamwork and the close relationships with our distributors, customers and suppliers
- our many years of experience and know-how in elaborating innovative solutions
- the quality, sustainability and reliability of our products



YOUR BEST PARTNER FOR FAN COIL UNITS

Customized terminals

Euroclima offers a wide range of both standardized and customized terminal units for residential and commercial buildings such as hotels, offices, schools, stores, museums, cinemas etc.. We do not only produce simple and cost effective products for comfort applications, but we can also comply with special requests such as marine or medical applications. Furthermore we can design special products for your own projects, built with the latest technology components. All fancoils can be delivered with factory fitted controls and accessories (valves, heating elements, etc.).




Our philosophy

- CUSTOMER – the trustful cooperation with our partners, customers and suppliers and our professionalism create the basis for long lasting partnerships
- EMPLOYEE – through the outstanding internal teamwork we are able to work efficiently and effectively
- COMMITMENT – our major commitment grants the best possible support to our customers, from design and production through to after-sale service

Our vision

The world and the market are changing very fast, we therefore continuously adapt our products and processes to meet the latest requirements and regulations. Our strategy is based on continuous development of environmentally friendly solutions in order to achieve the best possible indoor air quality. Innovation, sustainability and minimum operating costs are the key aspects we consider when designing new solutions.



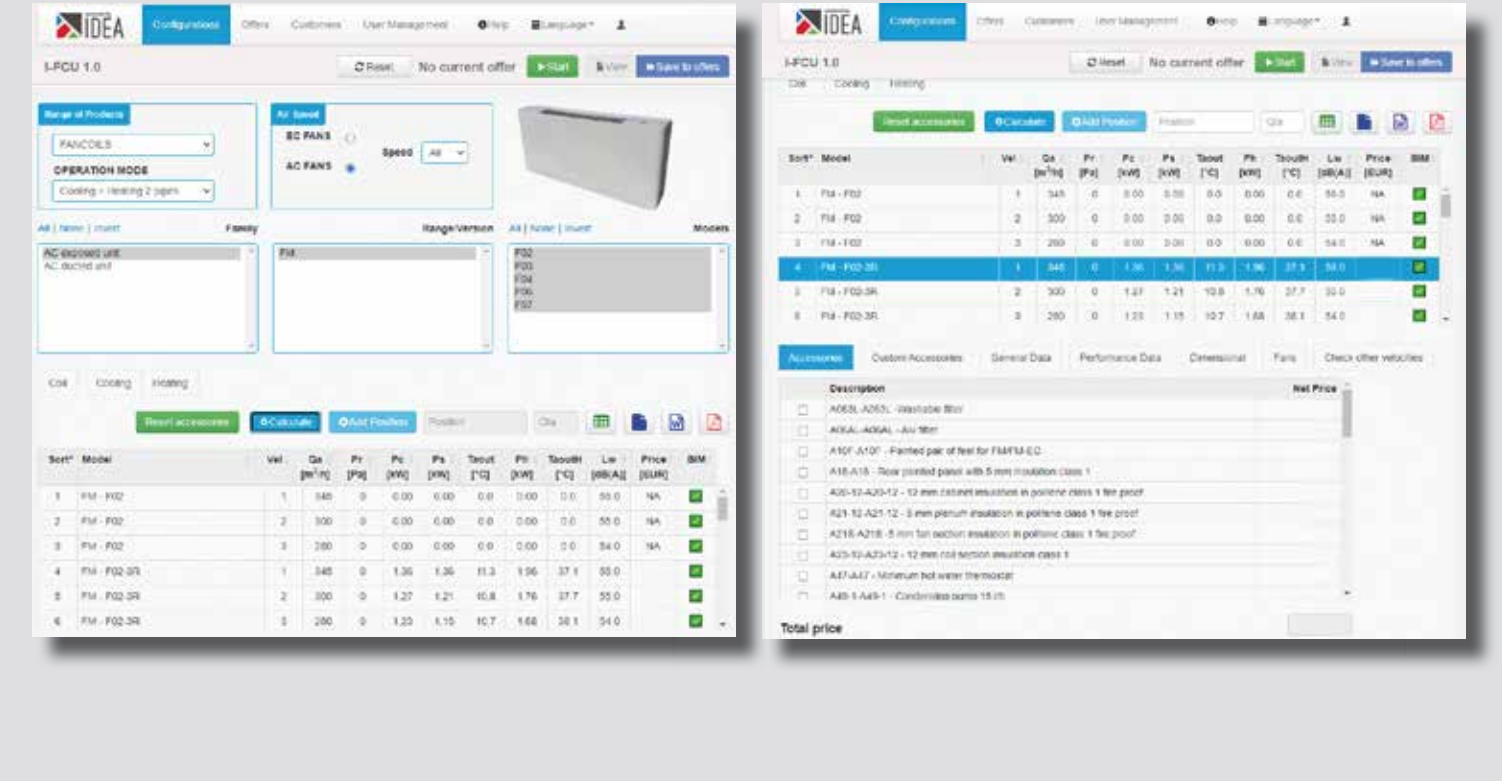

It is available in **7 languages**: Italian, English, French, German, Spanish, Russian and Dutch.

After setting the operating conditions, it is **simple to select the unit** and to print the **technical data** including **unit dimensions** as well as the **commercial offer**.

GENERAL FEATURES

COIL	Copper tubes DN 9,52 mm (3/8") staggered for greater heat transfer, highly efficient aluminium fins. Coil headers made of brass, copper or steel with connections for 2 or 4 pipe systems. Manual air vent valves as standard, automatic air vent valves optional. Working pressure = 13 bar / Test 20 bar, working temperature 80°C (max 100°C).
FILTER	Regenerable synthetic fiber enclosed in a galvanized frame with wire mesh protection. The filter is easily removable for cleaning and maintenance. Filter efficiency G1, G2 and G3. On request metallic, washable or highly efficient filters available.
FAN	Tangential, helicoidal and double inlet centrifugal fans with galvanized steel scrolls and aluminium or ABS impellers. The impellers are statically and dynamically balanced.
MOTOR	Motors in accordance with European Standard ErP2015 n. 327/2011 (where indicated), provided with self-lubricating bearings and cast aluminum enclosure (temperature class B or F, thermal protection incorporated) with or without autotransformer. For F-Series the motor are ATEX and IP 65 certified. <u>AC-motor</u> – V230/1/50-60Hz single phase, 3 or 5 depending on the the model, all speeds are wired to the terminal. <u>EC-motor</u> – V230/1/50-60Hz single phase, brushless, for continuous variable speed control (0...10V signal)
CASING	Frame construction made of galvanised steel, casing epoxy powder coated RAL 9010 (any RAL colour available on request). On request complete insulation on fan and coil section and cabinet (5 or 12 mm closed cells self-adhesive polyethylene, fireproof insulation class 1 European standard). Inclined drain pan made of galvanised steel, insulated 5 mm self-adhesive polyethylene as standard. On request drain pan made of stainless steel or epoxy powder coated. <u>DS series</u> – sandwich double skin self supporting panel 25 mm thick, outer skin 0,6 mm RAL 9010 precoated. Inner skin 1,0 mm galvanized sheet steel. Soundabsorbing rockwool insulation, non-combustible, fire class A1, density 20 kg/m³.
CONTROL	5-speed fan switch, all wired in electrical control box IP22 (IP55 on request), mechanical and electronic thermostats, unit or wall mounted available according to the fancoil model.
GRILLE	Anodized and coated aluminium grille.
THERMOSTAT	Mechanical or electronic, unit or wall mounted to control all the unit's functions (summer/winter switch, 3-speed fan switch), ready for valve control etc.. A great choice of regulations for standard and special applications is available.
VALVE	2, 3, 3 ways + bypass with on/off actuators (V230/1) and modulating actuators (0...10Vdc) for 2 or 4-pipe systems. They can be supplied loose or factory fitted.
HEATING ELEMENT	Stainless steel AISI 304 with alu-zinc fins, safety thermostat with manual reset (automatic on request), power contactor. Technical and constructional characteristics according to European safety regulations. Several heating elements can be connected parallelly to increase the heating capacity.
SUPPORTING FEET	For vertical units, made of sturdy galvanized steel epoxy coated, light grey RAL 7074, to be mounted on the units base for placement or screening of tubes.
PLENUM	Supply monoblock plenum with round spigot connections (max. DN 250 mm), return plenum is to be mounted separately. It can be internally insulated with closed cells self-adhesive polyethylene, fireproof insulation (class 1 European standard).
GERMICIDAL LAMP	High efficiency UV lamp, reduces the risk of contamination of coil fins. Used whenever a high degree of sterilization is required.

CASSETTES



The **innovative design** of the cassettes grants **high performance with low sound**. It is the perfect unit if the design comes first and it perfectly matches any surroundings or decor. The highly efficient fan and the adjustable blades grant a **perfect air distribution**. The dimensions of the cassette are suitable for all **European standard modules** and allow a **quick and easy installation**.

Wide range of models and huge availability of accessories make these cassettes adaptable to any request.





CASSETTES

CT-EC

4-way single and double

- Condensing pump, non-return valve and float included
- Easily removable and washable filter
- 2 pipe system
- Coil with 3 or 2+1 rows
- EC-motor
- Remote IR control or wall thermostat (on request)
- Electric heater and safety contactor (on request)
- fresh & adjacent room air spigot (on request)
- Panel in ABS
- Panel in powder coated aluminium on request

ebm

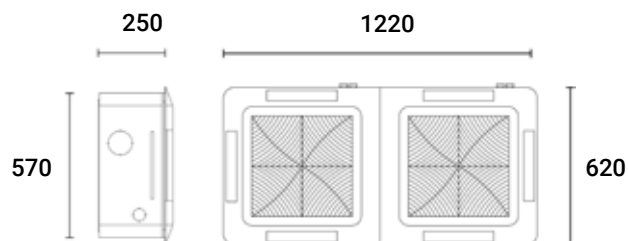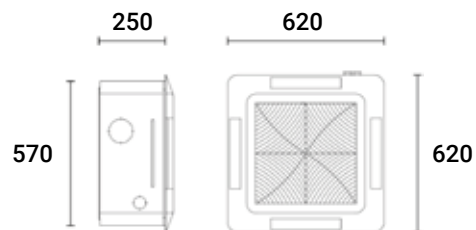

CT-EC		2 pipes 049	2-pipes 126
Nominal airflow	m ³ /h	950	1.620
Total cooling capacity ⁽¹⁾	kW	5,64	13,33
Sensible cooling capacity ⁽¹⁾	kW	3,93	9,10
Heating capacity ⁽²⁾	kW	6,04	12,70
Sound Power Level Lw ⁽³⁾	dB(A)	64,0	67,0

⁽¹⁾ Air 27/19°C – Water 7-12°C according to EN1397:2015

⁽²⁾ Air 20°C – Water 45-40°C according to EN1397:2015

⁽³⁾ 1/3 octave band frequency according to EN16583:2022




Euroclima participates in the EPC programme for Air Handling Units (AHU) and Fan Coil Units (FCU); Check ongoing validity of certificate: eurovent-certification.com

DECORATIVE UNITS




Euroclima decorative units with their unique design are the optimal solution for room installation in hotels, offices, hospitals, school etc.

Newest technologies, flexibility for special requirements, **wide performance range, effective control system** to **lower energy consumption, low noise**, clean air (air filtration), effective **air exchange, design**, production **quality** and **long lasting lifetime** are the main advantages.




DECORATIVE UNITS

F / FE



vertical

- Bottom intake and vertical discharge with ABS grille
- Easily removable G2 filter
- 2 or 4 pipes system
- Coil with 2, 3, 2+1 or 3+1 rows
- Extended drain pan with 5 mm insulation
- AC motor (F) and EC motor (FE)
- Motor ATEX and IP65

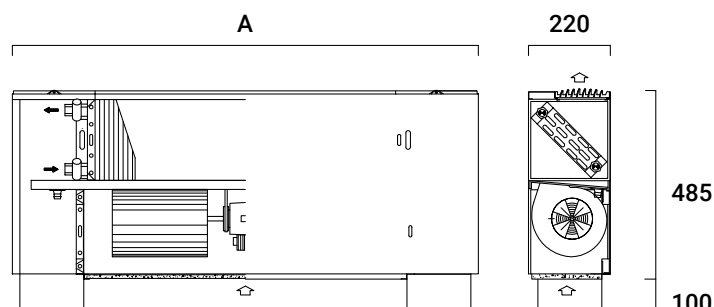

	F/FE	02	03	04	06	07
Nominal airflow	m³/h	345	435	720	805	980
Total cooling capacity ⁽¹⁾	kW	1,36	2,44	3,92	4,79	5,74
Sensible cooling capacity ⁽¹⁾	kW	1,36	1,87	2,95	3,45	4,16
Heating capacity ⁽²⁾	kW	2,13	2,85	4,54	5,23	6,33
Sound Power Level Lw ⁽³⁾	dB(A)	58	61	63	65	65
Width "A"	mm	840	1.040	1.240	1.440	1.640



Euroclima participates in the EPC programme for Air Handling Units (AHU) and Fan Coil Units (FCU); Check ongoing validity of certificate: eurovent-certification.com

⁽¹⁾ Air 27/19°C – Water 7-12°C according to EN1397:2015

⁽²⁾ Air 20°C – Water 45-40°C according to EN1397:2015


⁽³⁾ Air 20°C – Water 45-40°C according to EN16583:2022

T, TE




vertical (T) and horizontal (TE)

- Bottom intake and vertical discharge with alu grill (T)
- Side intake and side discharge with alu grill (TE)
- Easily removable G3 filter
- 2 or 4 pipe system
- Coil with 4, 5, 4+1 or 5+1 rows
- Drain pan insulated 5 mm
- Additional drain pan insulated 5 mm, if valve is mounted (only for type T)
- AC or EC motor

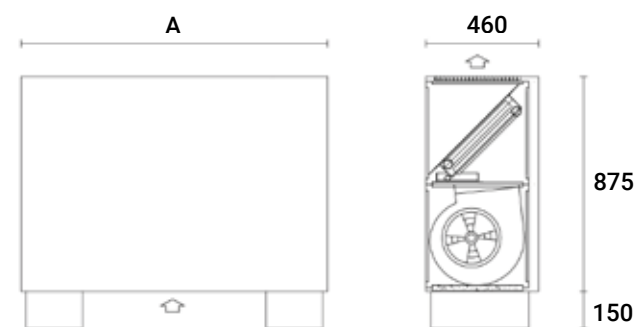

T

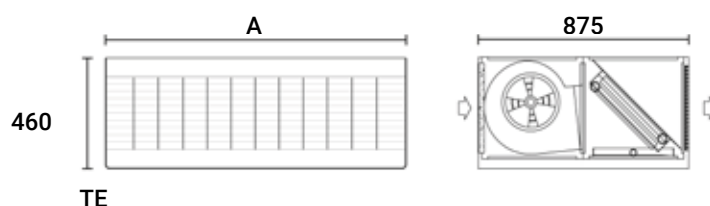

TE


	T TE	35
Nominal airflow	m³/h	2.965
Total cooling capacity ⁽¹⁾	kW	17,67
Sensible cooling capacity ⁽¹⁾	kW	11,75
Heating capacity ⁽²⁾	kW	23,37
Sound Power Level Lw ⁽³⁾	dB(A)	61
Width "A"	mm	2.050

⁽¹⁾ Air 27/50% r.h – Water 7-12°C

⁽²⁾ Air 20°C – Water 50°C same waterflow as in cooling conditions

⁽³⁾ Octave band central frequency


DUCTED UNITS

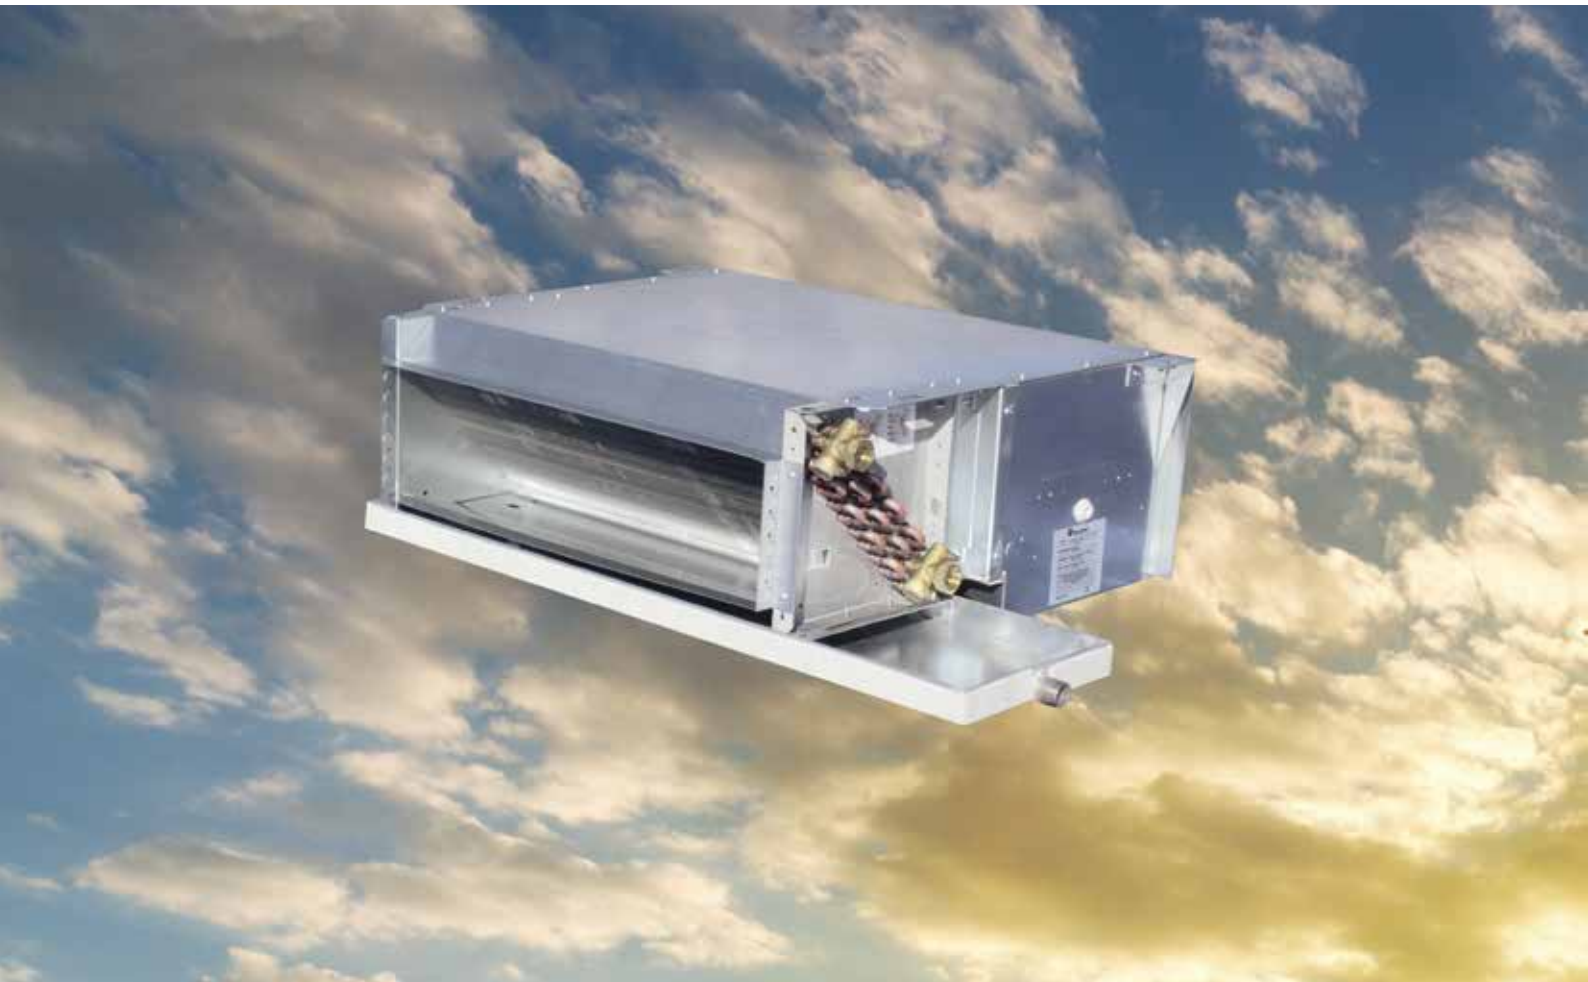

Euroclima ducted units are the optimal solution for **limited space**, mainly used for **installation in the false ceiling**.

The **design** of the units and the **optimally selected fans** guarantee **quiet operation** even at high external static pressure.

The units can be vertical or horizontal.

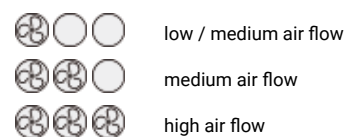

DUCTED UNITS


F-H, FE-H



horizontal

- Rear intake and horizontal discharge
- Easily removable G2 filter
- 2 or 4 pipes system
- Coil with 2, 3, 2+1 or 3+1 rows
- Extended drain pan with 5 mm insulation
- AC motor (F-H) and EC motor (FE-H)
- Motor ATEX and IP65

up to 70 Pa

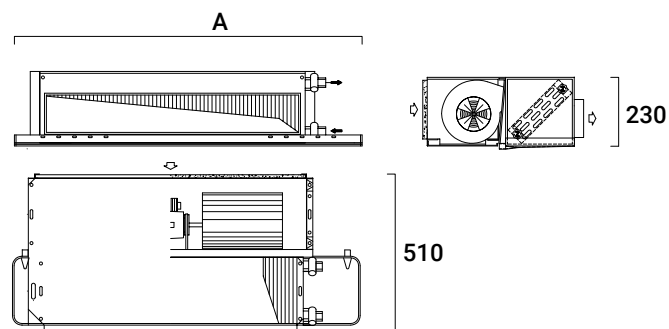

F-H/FE-H		02	03	04	06	07	09
Nominal airflow	max m³/h Pa	288 52	345 52	587 52	695 52	809 52	999 52
Nominal airflow	med m³/h Pa	270 50	323 50	554 50	652 50	764 50	941 50
Nominal airflow	min m³/h Pa	249 44	306 48	517 45	625 48	705 46	893 47
Total cooling capacity ⁽¹⁾	kW	1,24	1,94	3,27	4,23	4,88	6,24
Sensible cooling capacity ⁽¹⁾	kW	1,17	1,55	2,51	3,07	3,58	4,43
Heating capacity ⁽²⁾	kW	1,83	2,34	3,82	4,63	5,39	6,67
Sound Power Level Lw inlet+radiated ⁽³⁾	db(A)	64	65	68	69	71	71
Sound Power Level Lw outlet duct ⁽³⁾	db(A)	63	64	67	68	70	70
Width "A"	mm	700	900	1.100	1.300	1.500	1.700



Euroclima participates in the EPC programme for Air Handling Units (AHU) and Fan Coil Units (FCU); Check ongoing validity of certificate: eurovent-certification.com

⁽¹⁾ Air: 27/19° C - Water in: 7/12° C according to EN1397:2015

⁽²⁾ Air: 20° C - Water in 45-40° C according to EN1397:2015

⁽³⁾ 1/3 Octave band frequency according to EN16583:2022

DUCTED UNITS


C-H/CE-H



horizontal

- Rear intake and horizontal discharge
- Easily removable G3 filter
- 2 or 4 pipes system
- Coil with 2, 3, 2+1 or 3+1 rows
- Extended drain pan with 5 mm insulation
- AC motor (C-H) and EC motor (CE-H)

up to 160 Pa

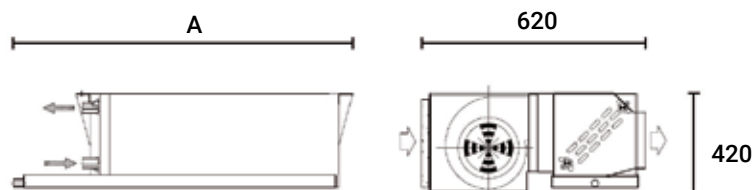

Euroclima participates in the EPC programme for Air Handling Units (AHU) and Fan Coil Units (FCU). Check ongoing validity of certificate: eurovent-certification.com

C-H / CE-H		09	11	17	20	23	32
Nominal airflow	max m³/h Pa	774 57	867 60	1568 58	1646 59	2205 60	2391 60
Nominal airflow	med m³/h Pa	725 50	799 50	1450 50	1519 50	1999 50	2195 50
Nominal airflow	min m³/h Pa	637 38	735 42	1303 41	1382 42	1803 41	2009 42
Total cooling capacity ⁽¹⁾	kW	3,61	4,34	7,31	8,39	10,42	12,63
Sensible cooling capacity ⁽¹⁾	kW	2,63	3,18	5,32	5,93	7,59	8,87
Heating capacity ⁽²⁾	kW	4,16	4,98	8,42	9,28	11,99	13,82
Sound Power Level Lw inlet+radiated ⁽³⁾	db(A)	71	71	75	73	75	74
Sound Power Level Lw outlet duct ⁽³⁾	db(A)	70	70	74	72	74	73
Width "A"	mm	700	900	1.100	1.300	1.500	1.700

⁽¹⁾ Air: 27/19° C - Water in: 7/12° C according to EN1397:2015

⁽²⁾ Air: 20° C - Water in 45-40° C according to EN1397:2015

⁽³⁾ 1/3 Octave band frequency according to EN16583:2022

DUCTED UNITS

T-H, TE-H




- Bottom intake and vertical discharge with alu grill (TE-H)
- Rear intake and horizontal discharge with alu grill (T-H)
- Easily removable G3 filter
- 2 or 4 pipe systems
- Coil with 4, 5, 4+1 or 5+1 rows
- Drain pan insulated 5 mm
- AC or EC motor

	T-H TE-H	30	35	50	60
Nominal airflow	m ³ /h	4.325	4.700	5.860	6.780
Total cooling capacity ⁽¹⁾	kW	22,95	25,24	31,10	35,19
Sensible cooling capacity ⁽¹⁾	kW	15,10	16,66	20,41	23,29
Heating capacity ⁽²⁾	kW	30,97	34,07	41,90	47,91
Sound Power Level L _w ⁽³⁾	dB(A)	73	72	75	73
Width "A"	mm	1.400	1.600	1.800	2.000

⁽¹⁾ Air 27/50% r.h – Water 7-12°C

⁽²⁾ Air 20°C – Water 50°C same waterflow as in cooling conditions

⁽³⁾ Octave band central frequency

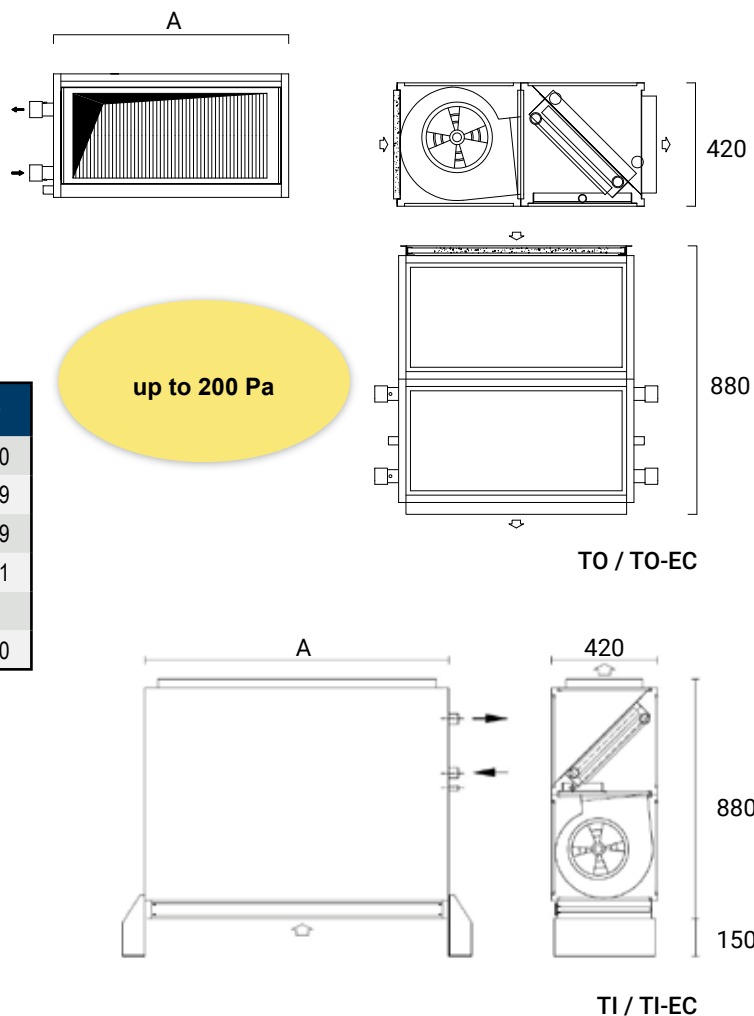


DOUBLE SKIN SELF-SUPPORTING UNITS



Euroclima double skin self-supporting units are the optimal solution for **limited space**, mainly used for **installation in the false ceiling**.

Thanks to the **double skin construction** (23 mm soundabsorbing rock wool insulation with 20 kg/m³) the unit can handle **high static pressure drops** with reduced noise values.



DOUBLE SKIN SELF-SUPPORTING UNITS

DF/DEF



horizontal

- 25 mm double skin panel with rock wool (20kg/m³)
- Rear intake and horizontal discharge
- Easily removable G2 filter
- 2 or 4 pipes system
- Coil with 2, 3, 2+1 or 3+1 rows
- Drain pan with 5 mm insulation
- AC motor (DF) and EC motor (DEF)
- Motor ATEX and IP65



up to 70 Pa

	DF/DEF	02	03	04	06	07	09
Nominal airflow	m ³ /h	405	480	850	940	1.140	1.325
Total cooling capacity ⁽¹⁾	kW	2,28	3,34	4,74	5,68	6,81	8,16
Sensible cooling capacity ⁽¹⁾	kW	1,57	2,16	3,26	3,78	4,56	5,36
Heating capacity ⁽²⁾	kW	2,96	3,94	6,15	7,08	8,54	10,03
Sound Power Level Lw ⁽³⁾	db(A)	54	55	60	60	61	63
Width "A"	mm	600	800	1.000	1.200	1.400	1.600

⁽¹⁾ Air 27/50% r.h – Water 7-12°C

⁽²⁾ Air 20°C – Water 50°C same waterflow as in cooling conditions


⁽³⁾ Octave band central frequency

DC/DEC



horizontal

- 25 mm double skin panel with rock wool (20kg/m³)
- Rear intake and horizontal discharge
- Easily removable G3 filter
- 2 or 4 pipes system
- Coil with 3, 4 or 3+1 rows
- Drain pan with 5 mm insulation
- AC motor (DC) and EC motor (DEC)

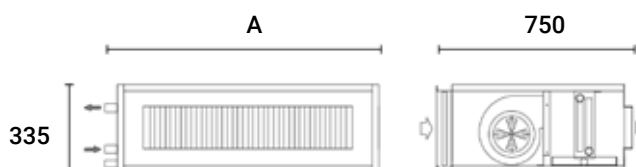

up to 160 Pa

	DC/DEC	09	11	17	20	23	32
Nominal airflow	m ³ /h	900	1.080	1.800	1.975	2.570	2.910
Total cooling capacity ⁽¹⁾	kW	4,20	6,23	10,07	11,88	15,19	17,82
Sensible cooling capacity ⁽¹⁾	kW	3,27	4,29	6,83	7,85	10,03	11,79
Heating capacity ⁽²⁾	kW	6,06	8,01	12,86	14,69	18,83	21,97
Sound Power Level Lw ⁽³⁾	db(A)	63	63	67	64	66	67
Width "A"	mm	600	800	1.000	1.200	1.400	1.600

⁽¹⁾ Air 27/50% r.h – Water 7-12°C

⁽²⁾ Air 20°C – Water 50°C same waterflow as in cooling conditions

⁽³⁾ Octave band central frequency


DOUBLE SKIN SELF-SUPPORTING UNITS

DT/DET



horizontal

- 25 mm double skin panel with rock wool (20kg/m³)
- Rear intake and horizontal discharge
- Easily removable G3 filter
- 2 or 4 pipes system
- Coil with 4, 5, 4+1 or 5+1 rows
- Drain pan with 5 mm insulation
- AC motor (DT) and EC motor (DET)

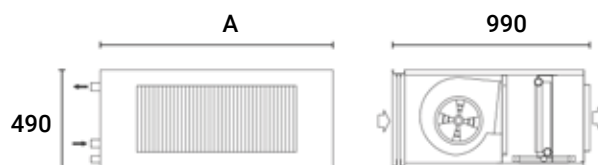

up to 200 Pa

	DT/DET	15	20	30	35	50	60
Nominal airflow	m ³ /h	2.170	2.170	4.325	4.700	5.860	6.780
Total cooling capacity ⁽¹⁾	kW	14,12	14,85	28,16	31,40	38,05	43,78
Sensible cooling capacity ⁽¹⁾	kW	9,42	9,97	18,79	20,80	25,37	29,19
Heating capacity ⁽²⁾	kW	17,26	18,01	34,41	37,95	46,51	53,57
Sound Power Level Lw ⁽³⁾	db(A)	67	66	71	70	73	71
Width "A"	mm	800	1.000	1.400	1.600	1.800	2.000

⁽¹⁾ Air 27/50% r.h – Water 7-12°C

⁽²⁾ Air 20°C – Water 50°C same waterflow as in cooling conditions


⁽³⁾ Octave band central frequency

TE-DS



horizontal

- 25 mm double skin panel with rock wool (20kg/m³)
- Rear intake and horizontal discharge
- Easily removable G3 filter
- 2 or 4 pipes system
- Coil with 5, 6, 5+1 or 6+1 rows
- Drain pan with 5 mm insulation
- EC motor

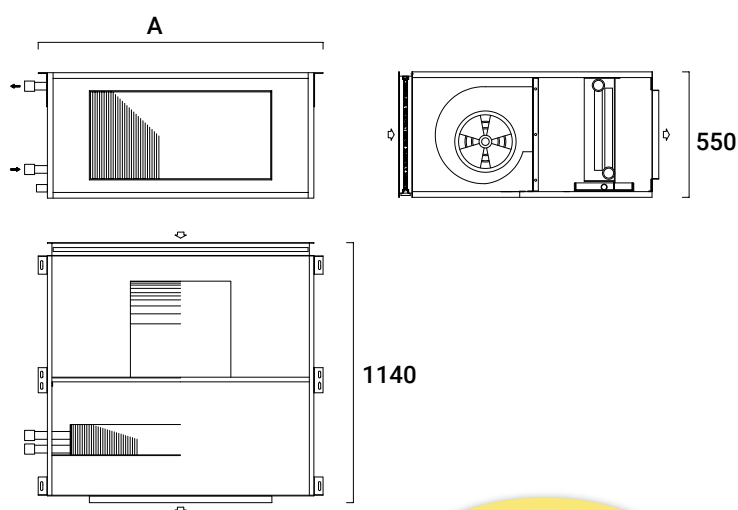

up to 400 Pa

	TE-DS	20	30	60
Nominal airflow	m ³ /h	3.266	5.847	9.111
Total cooling capacity ⁽¹⁾	kW	21,90	38,92	60,28
Sensible cooling capacity ⁽¹⁾	kW	15,24	26,56	41,09
Heating capacity ⁽²⁾	kW	27,32	47,99	74,38
Sound Power Level Lw ⁽³⁾	db(A)	75	78	79
Width "A"	mm	1.000	1.400	2.000

⁽¹⁾ Air 27/50% r.h – Water 7-12°C

⁽²⁾ Air 20°C – Water 50°C same waterflow as in cooling conditions

⁽³⁾ Octave band central frequency


DOUBLE SKIN SELF-SUPPORTING UNITS

TME



horizontal

- 25 mm mm double skin panel with rock wool (20kg/m3)
- Rear intake and horizontal discharge
- Easily removable double filter G3+F7
- 2 pipes system
- Coil with 5 or 6 rows
- Silencers on supply and precutted sheet on fan section
- Drain pan with 5 mm insulation
- EC motor (monophase)

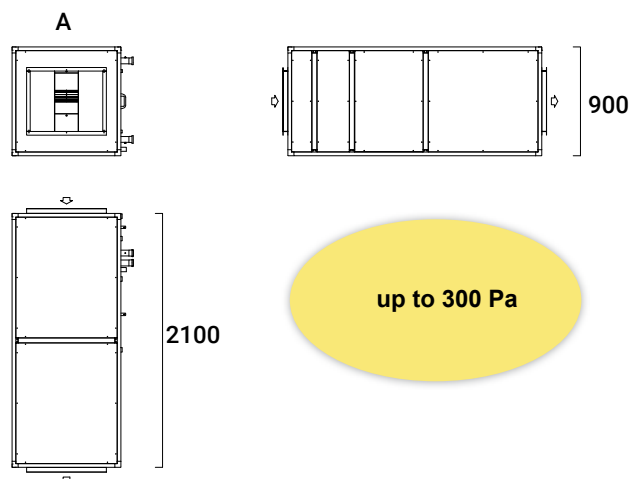

	TME	035	070	105	140
Nominal airflow	m³/h	4.380	8.190	11.390	14.020
Total cooling capacity ⁽¹⁾	kW	30,24	58,41	82,82	103,55
Sensible cooling capacity ⁽¹⁾	kW	20,22	38,56	54,49	67,77
Heating capacity ⁽²⁾	kW	36,44	69,15	97,29	120,66
Sound Power Level Lw ⁽³⁾	dB(A)	66	69	71	73
Width "A"	mm	900	1.500	2.100	2.610

⁽¹⁾ Air 27/50% r.h – Water 7-12°C

⁽²⁾ Air 20°C – Water 50°C same waterflow as in cooling conditions

⁽³⁾ Octave band central frequency

CONTROLS AND REGULATIONS

SERIE A-C300-304

Electronic multifunction thermostat BMS (Building Management System)





- 1 Pre-programmed controller with display, clock and communication



- Communication via RS485 (Modbus or BACnet)
- Quick and safe onfiguration with the Evolution tool
- Easy installation
- Control On/Off or 0...10 V
- Input for keycard, window contract, CO2 sensor and season change modus
- Clock for management of time bands

USB connection for
parameter configuration
& software update

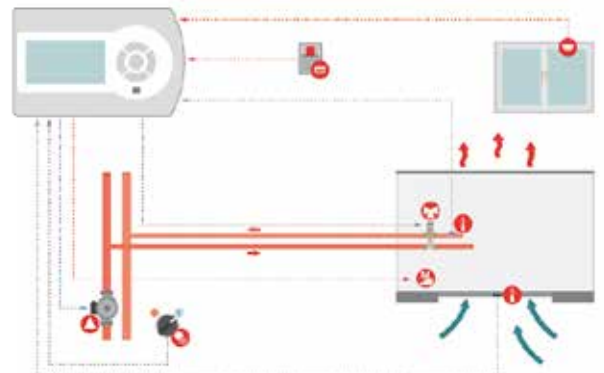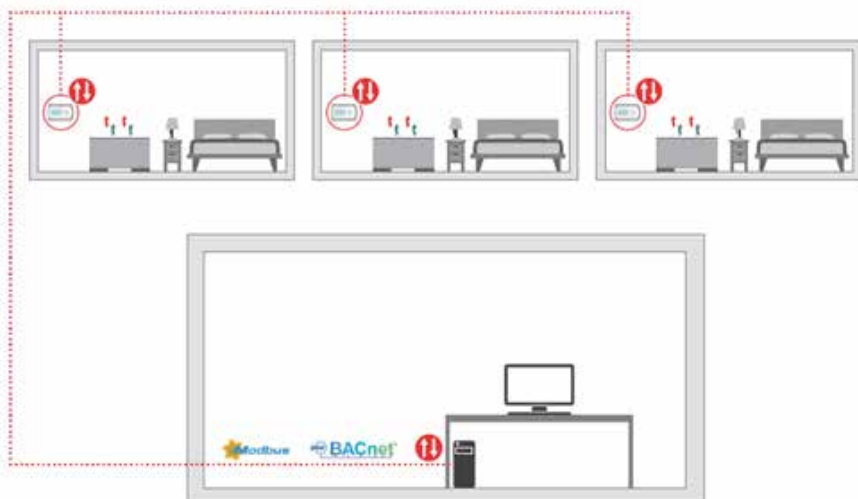

CONTROLS AND REGULATIONS



A630 & A530 - Electronic analog thermostat unit mounted (AC-motors)

3-speed fan switch, summer/winter switch, desired room temperature control, continuous/thermostat controlled ventilation, for 2 or 4 pipes systems, with valve control (A530) or without valve control (A630), with or without minimum water temperature thermostat, with internal or remote temperature sensor.



A70 & A70D - Electronic thermostat (AC-motors)

3-speed fan switch, summer/winter switch, desired room temperature control, continuous/thermostat controlled ventilation, for 2 or 4 pipes systems, with or without valve control, with or without minimum water temperature thermostat, with internal or remote temperature sensor. A70 analog, A70D digital.



A111 - Electronic digital thermostat (EC motors)

Configurable with 0...10 Vdc for EC-motors, desired room temperature control, summer/winter switch, continuous/thermostat controlled ventilation, for 2 or 4 pipes systems, with or without valve control ON/OFF and modulating (24 Vac), with or without minimum water temperature thermostat, with internal or remote temperature sensor.



A94 - Power interface

Power supply 230Vac - controls up to 4 fancoils with 3 speeds. The signals transmitted from the thermostat respectively switch a relay which controls the wired speed of the motor (max. 3A - 250V for each motor).



TEL - IR Remote control for Cassettes

3-speed fan switch, desired room temperature control, summer/winter switch, continuous/thermostat controlled ventilation.



EE & EH - Electrical heating element (V230/1)

Standard or high capacity heating elements from 700 to 5000 W including security thermostat with manual reset (automatic reset on request) and power contactor, wired to electric box. Dimensions from 350 to 1550 mm. Support for the parallel connection of several heating elements (on request).

CONTROLS AND REGULATIONS



Actuator V230/1

22C (ON/OFF) – NC with thermostatic wax element, (24Vac on request)
SMP28 (ON/OFF) – for 3-way globe valves DN from 1"
EMUJIC (MODULATING) – actuator 24Vac with LED signal



2 / 3-way valve + bypass

Available for DN ½" and DN ¾"
Brass valve body with steel shaft, PN 16



2 / 3-way valve

Available for DN 1" and DN 1 ½"
Brass valve body with steel shaft, PN 16



Stop valve, balancing valve, ball valve

Stop valve on the water entry to manually regulate the water flow.
Balancing valve on the water exit to balance the water circuit.
Ball valve for DN from 1"



A49 - Condensate pump



Composed of pump block and detection unit, flow rate 10, 20 and 30 l/h for fancoils with low, medium and high air flow.



Germicidal lamp kit

Composed of: germicidal lamp, electronic ballast, lamp holder, galva steel support for germicidal lamp kit

REFERENCES

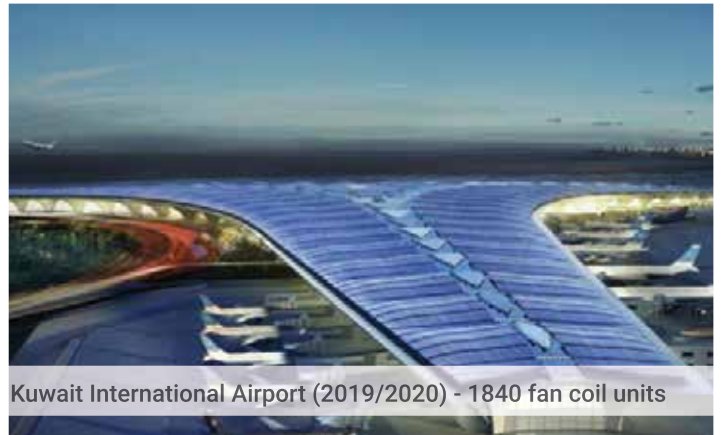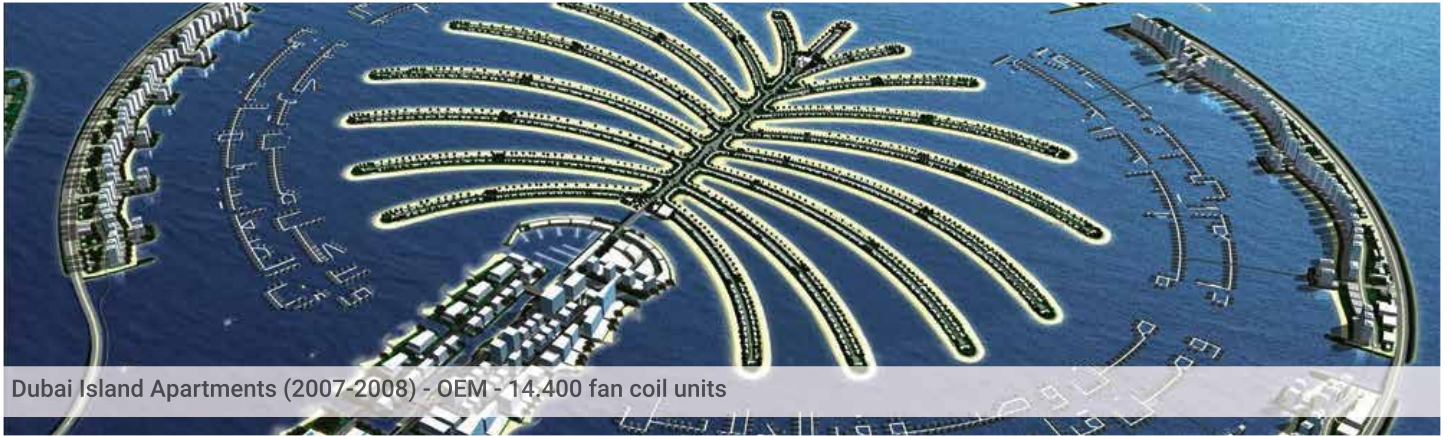

REFERENCES




New Juventus Stadium, Turin (2013) - 20 fan coil units



Bank of Italy Head Office, Rome (2003) - 300 fan coil units



Egyptian Museum, Turin (2012) - 25 fan coil units

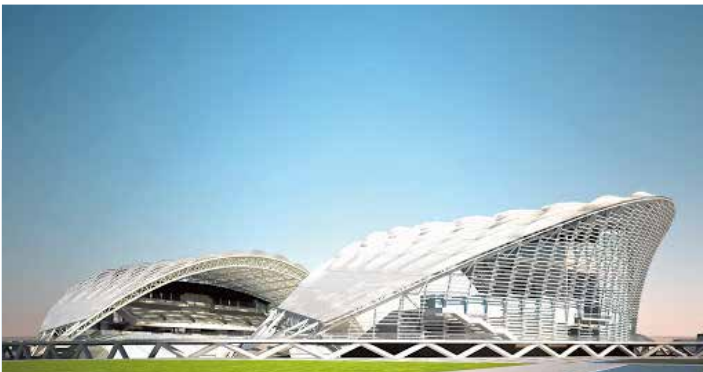


Kuwait university SAAF (2019) - 192 fan coil units



Church of the Eremitani, Padova (2011) - 40 fan coil units




Ministry of Mercantile Marine, Rome (1998) - 200 fan coil units

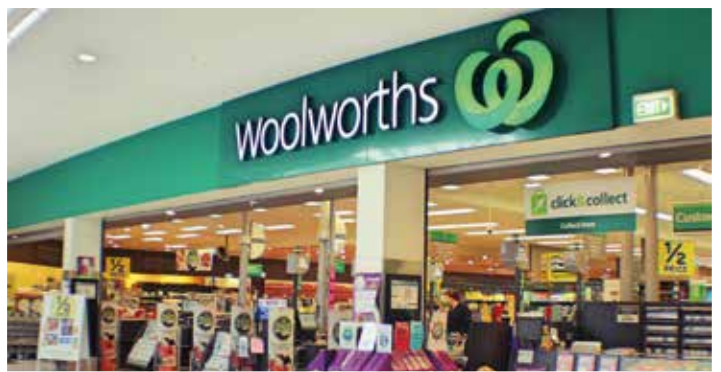

Woolworths supermarket, Australia, Chelsea Heights (2016) - 2 fan coil units

REFERENCES

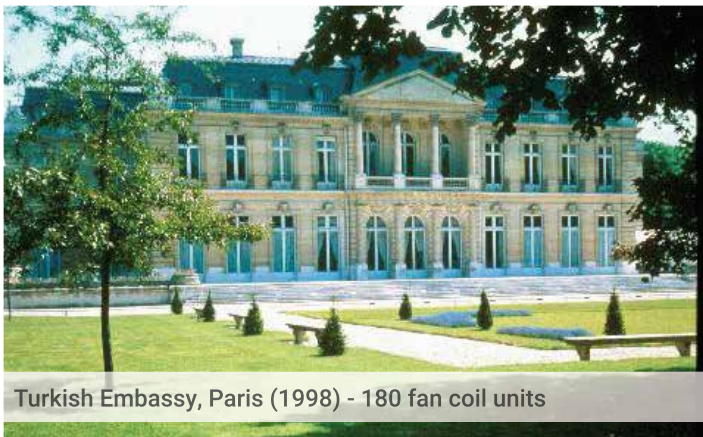

Euroclima group factories

Euroclima AG | SpA
St. Lorenzner Str. | Via S. Lorenzo 36
39031 Bruneck | Brunico (BZ)
ITALY
Tel. +39 0474 570 900
info@euroclima.com
www.euroclima.com

Euroclima Apparatebau Ges.m.b.H.
Arnbach 88
9920 Sillian
AUSTRIA
Tel. +43 (0) 48 42 66 61 -0
info@euroclima.at
www.euroclima.com

Euroclima Middle East
P.O.Box: 119870
Dubai
UNITED ARAB EMIRATES
Tel. +9714 802 4000
eumeinfo@euroclima.com
www.euroclima.com

Euroclima India Pvt Ltd.
Office no 501,505
Tropical new era business park
Opp. ESIC kamgar Hospital Road no -33
400604 Thane - Maharashtra
INDIA
Tel. +91 22 4015 8934
info@euroclima.in
www.euroclima.com

Bini Clima S.r.l.
Via A. Prato, 4 / A
38068 Rovereto
ITALY
Tel. +39 0464 437 232
info@biniclima.eu
www.biniclima.eu

Euroclima product catalogues

