

Attention!!
If a repair switch is selected,
the connection is made directly to the repair switch
without connection to the terminals

Customer circuit

Speed adjustable
via
potentiometer

+10V

GND

2

1

Ain1 U
(0-10V) ω


Speed adjustable
via
0-10VDC signal

Ain1 U 0-10VDC
(0-10V)
GND

not scope
of supply of
Euroclima

Legend

1	White	WH
2	Brown	BN
3	Green	Gn
4	Yellow	YE
5	Grey	GY
6	Pink	PK
7	Blue	BU
8	Red	RD
9	Black	BK
10	Violet	VI

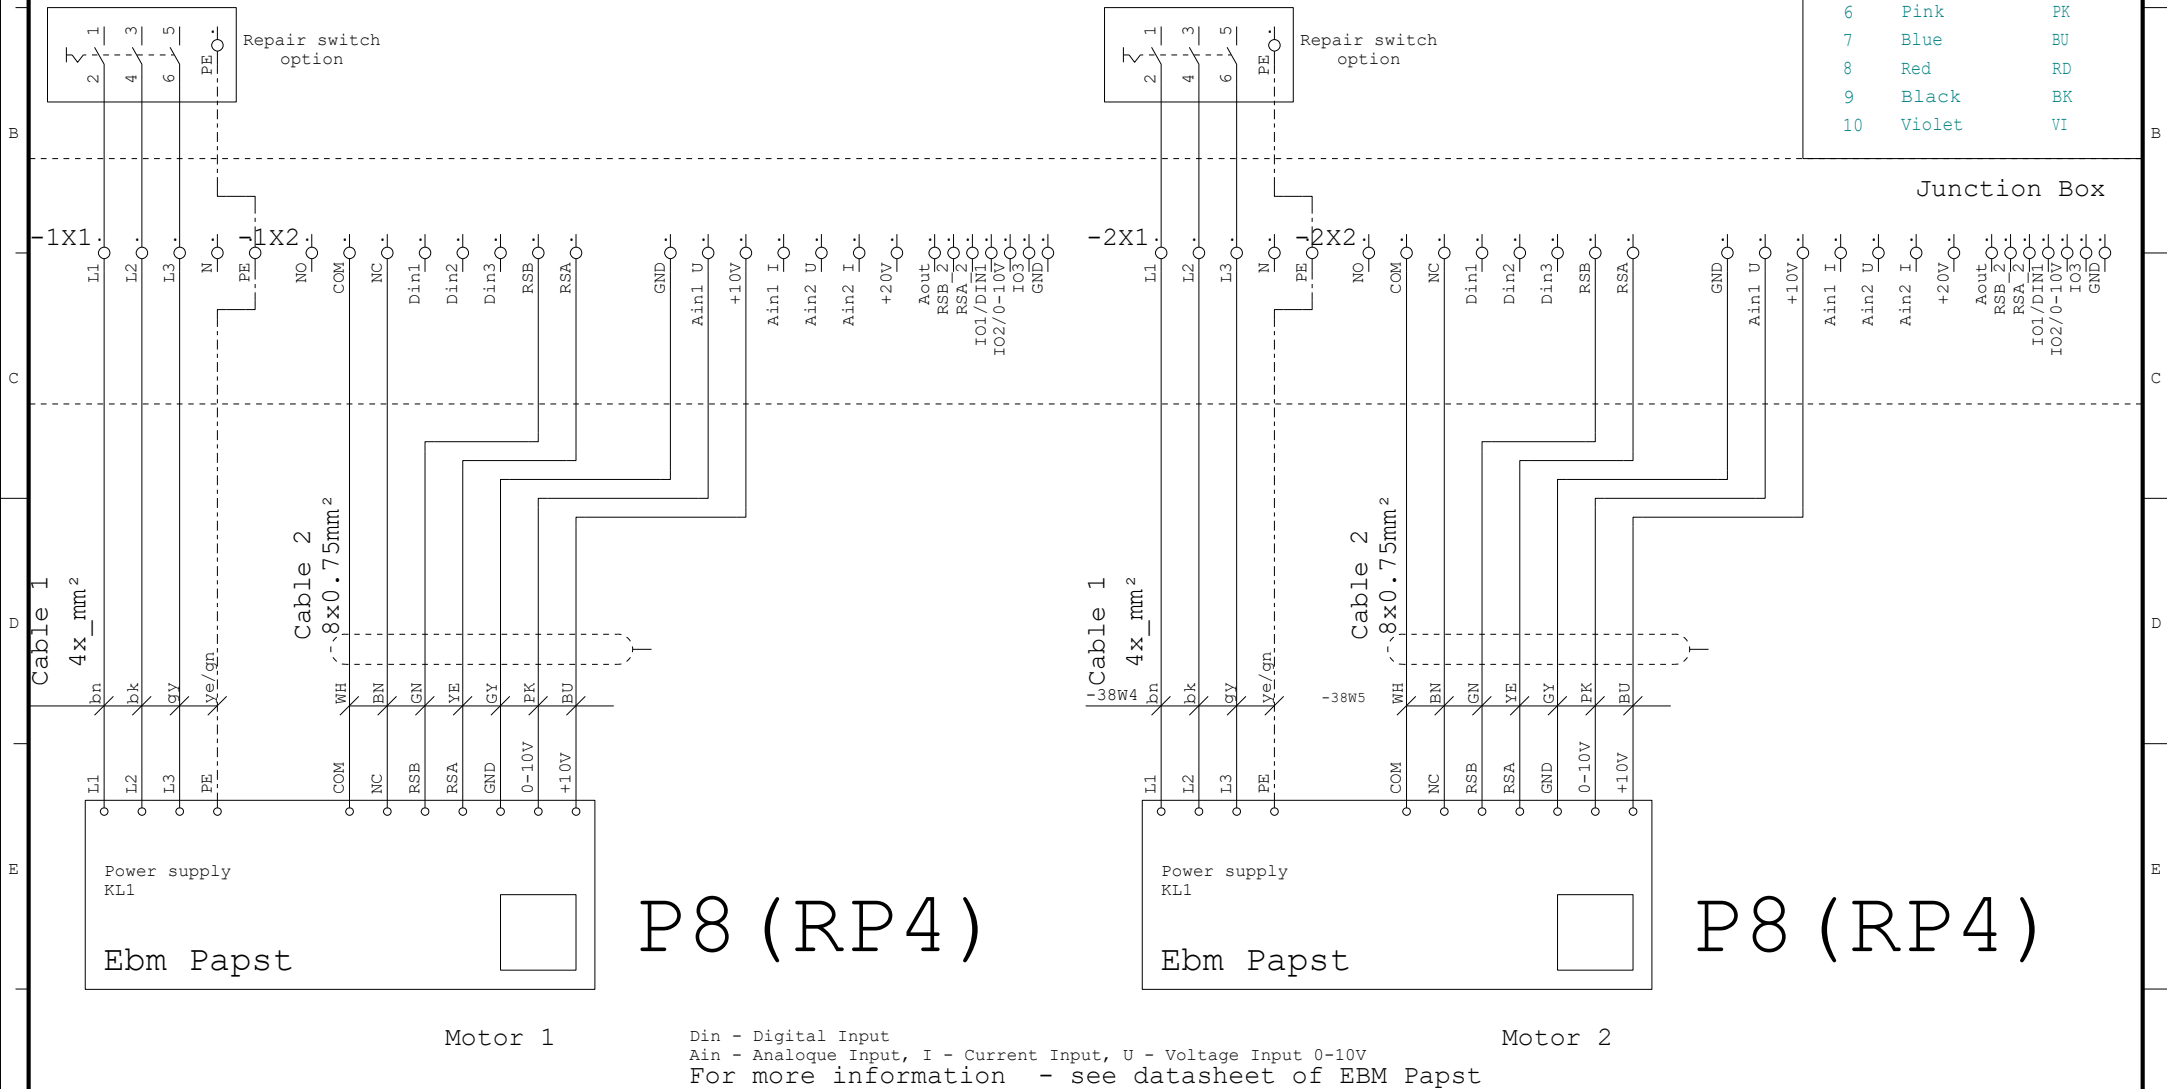

P8 (RP4)

P8 (RP4)

Din - Digital Input
Ain - Analogue Input, I - Current Input, U - Voltage Input 0-10V
For more information - see datasheet of EBM Papst

				Date	26.03.20	 euroclima® We care for better air...		2x Fan P8 - RP4	Position		=	F
				Draw.	MaWi						+	
				Check								
Status	rev.	Date	Nom	Norm					Project pages		Sheet 56	
									Total 151			
									actual 56			von 151Bl.